

# SEPARATELY EXCITED ELECTRONIC MOTOR SPEED CONTROLLER

MODEL 1266 SepEx®



CURTIS



## DESCRIPTION

Curtis PMC Model 1266 SepEx® controllers are programmable and microprocessor based, with an advanced MOSFET power section for smooth and seamless control of separately excited motors.

## APPLICATION

Curtis PMC 1266 SepEx® controllers are designed for use in two passenger golf/utility vehicles.

## FEATURES

### Smooth and Secure Control

- Power MOSFET technology provides smooth, silent, efficient, and cost-effective operation.
- Adjustable parameters enable custom optimization of speed, torque, and braking control.
- Half bridge armature and full bridge field provides regenerative braking down to near zero speed.
- Rugged package rated at IP5X.
- Overspeed braking (regenerative) limits speed while driving downhill.
- WalkAway™ braking feature limits any stopped or key-off rolling to very low speed. (Optional)
- System uses Hall effect speed sensor on motor or drive train to control vehicle speed.
- Tow switch enables free rolling for towing of vehicle.
- Anti-rollback function provides improved control when throttle is released on hills.
- Anti-stall function helps prevent motor commutator damage.
- Controller drives warning buzzer – steady in reverse; intermittent during WalkAway™ braking.
- MultiMode™ input provides for two speed and power modes of operation.
- Timed shutdown of main contactor after pedal is released and vehicle has stopped.
- LED status indicator.
- Fully compatible with 1311, 1314 and 1307 Programmers for parametric adjustment, tuning, test, and diagnostics.
- Extensive fault detection and diagnostic reporting using a Curtis Programmer including (partial list):
  - Main contactor weld check and driver check
  - Throttle and wiring faults
  - Open or shorted motor field winding
  - Open motor armature winding
  - Over-temperature
  - Missing or failed speed sensor
  - Armature drive failure.

# MODEL 1266 SepEx®

## FEATURES continued

- Extensive system monitor capabilities using a Curtis Programmer, including (partial list):
  - Battery voltage
  - Throttle input
  - Direction and throttle switch operation
  - Motor field and armature currents
  - Controller heatsink temperature.

## OPTIONS

- E/M brake.
- WalkAway™ braking feature to slow vehicle during key-off.
- 5K 3-wire, 0-5V, or ITS throttle.


## Meets or complies with relevant US and International Regulations

- Manufactured under ISO 9001 certified Quality Management System.
- UL Recognized Component Status.

## MODEL CHART


Curtis PMC Model	Voltage (V)	Armature Rating (Amp) 2 Minute	Field Rating (Amp) 2 Minute
1266-52xx	36-48	275	20

## TYPICAL WIRING DIAGRAM

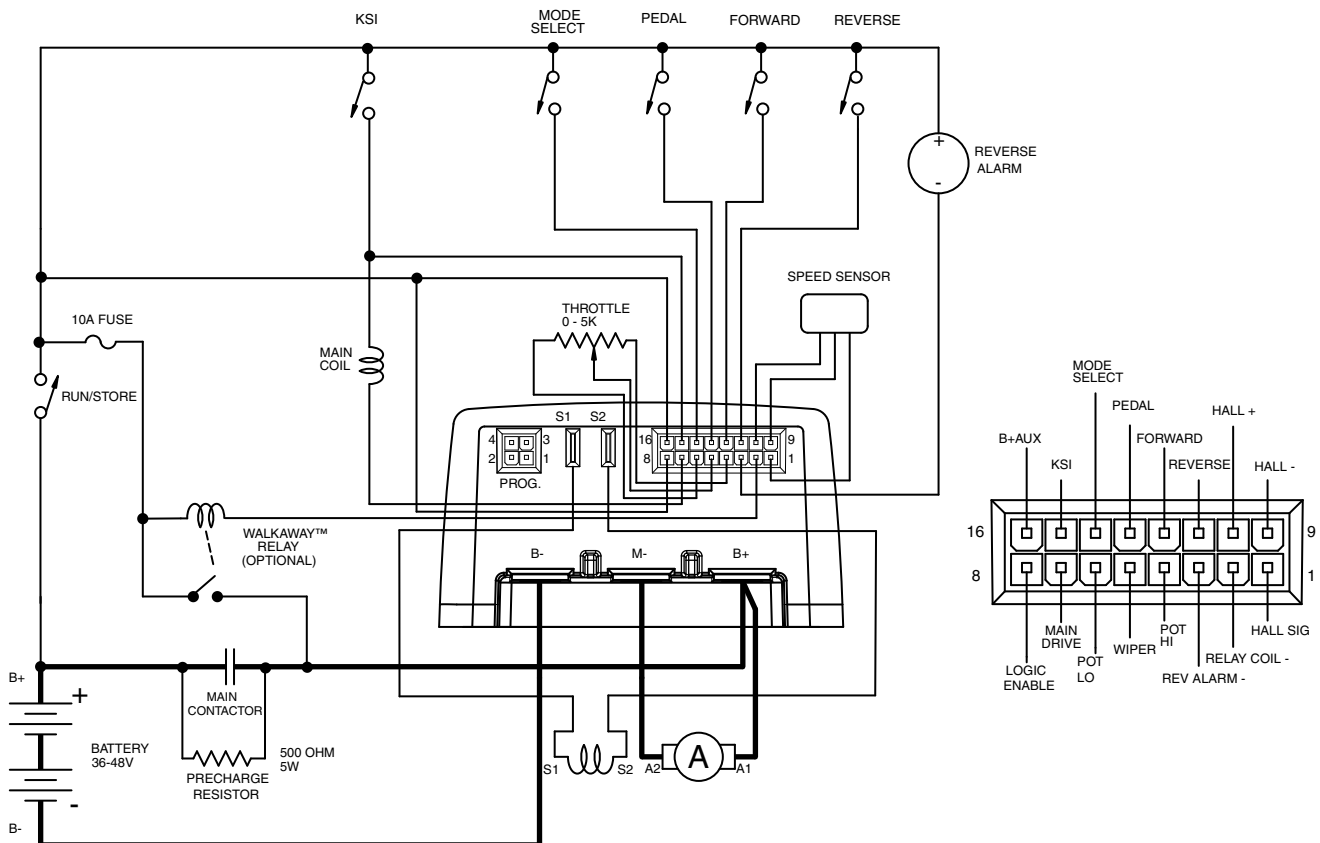

# MODEL 1266 SepEx<sup>®</sup>

## DIMENSIONS mm

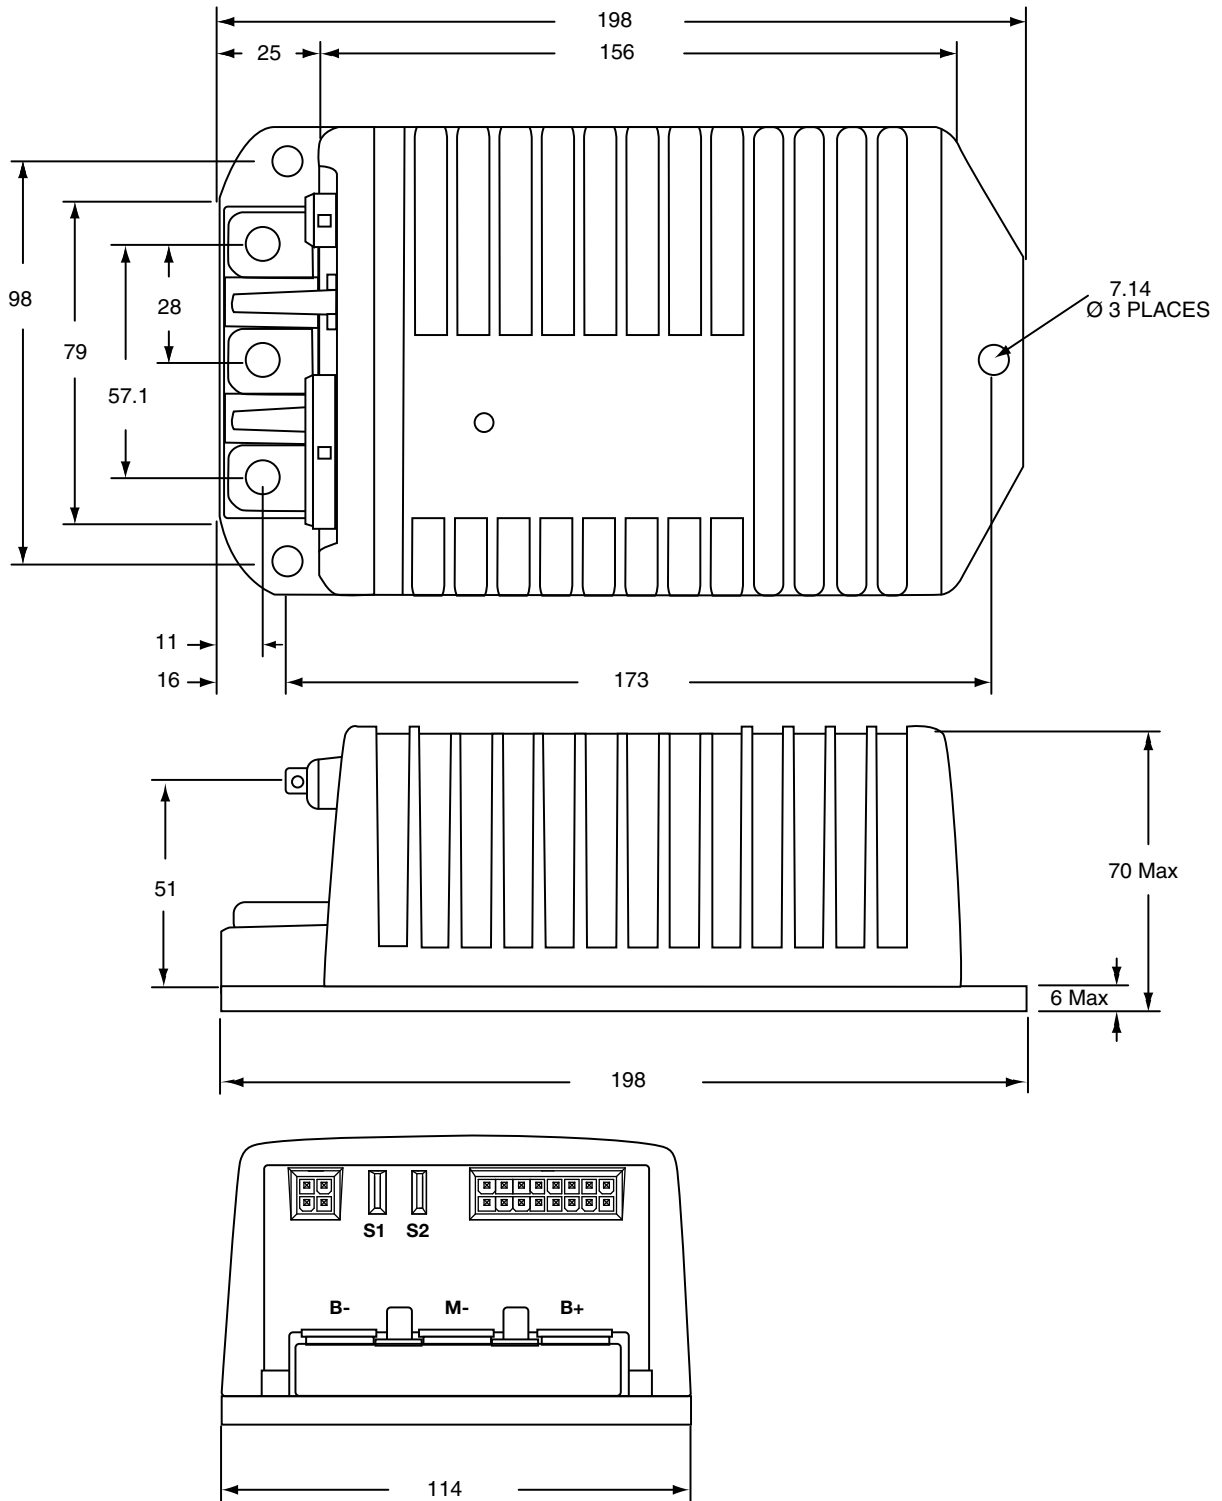

**WARRANTY** Two year limited warranty from time of delivery.

